

**Specifications**

Thermodynamic cycle		Diesel 4 stroke	
Air intake		TAA	
Arrangement		6L	
Bore x Stroke	mm	125 x 140	
Total displacement	l	10.3	
Valves per cylinder		4	
Injection system		Electronic Unit Injector	
Speed governor		Electronic	
Cooling system		liquid (water - paraflu 50%)	
Flywheel housing/flywheel	type	SAE1 / 14"	
Flywheel rotation		CCW	
Lube oil specifications		ACEA E3-E5	
Lube oil consumption		<0.1% of fuel consumption	
Fuel specifications		EN 590	
Oil and filters intervals for replacement	hours	600	
Fuel consumption at:	rpm	1500	1800
	100% load l/h (g/kWh)	62.8 (192)	76.4 (210.5)
	80% load l/h (g/kWh)	53.7(198)	63.8 (219.8)
	50% load l/h (g/kWh)	36.4 (202.5)	43.7 (218.6)
Coolant capacity: engine only	l	~15	
	engine+radiator	l	~63
ATB (without canopy)	°C	58	
<b>No remote cooling radiator allowed</b>			
Lube oil total system capacity including pipes, filters etc.	l	~30	
Electrical system		12Vcc	
Starting batteries: recommended capacity	Ah	2 x 185	
Discharge current (EN 50342)	A	1200	
Cold starting: without air preheating	°C	-10	
	with air preheating	°C	-25

**Performances**

Ratings <sup>1</sup>		1500 rpm		1800 rpm	
		PRIME	STAND-BY	PRIME	STAND-BY
Rated Output <sup>2</sup>	kWm	263	286	290	311

1) Ratings in accordance with ISO 8528. For duty at temperature over 40°C and/or altitude over 1000 meters must be considered a power derating factor. Contact the FPT sales organization.

2) Net power at flywheel available after 50 hours running with a ±3% tolerance.

**PRIME POWER:** The prime power is the maximum power available with varying loads for an unlimited number of hours. The average power output during a 24h period of operation must not exceed 80% of the declared prime power between the prescribed maintenance intervals and at standard environmental conditions. A 10% overload is permissible for 1 hour every 12 hours of operation.

**STAND-BY POWER:** The stand-by power is the maximum power available for a period of 500 hours/year with a mean load factor of 90% of the declared stand-by power. No kind of overloads is permissible for this use.

**CONTINUOUS POWER:** Contact the FPT sales organization.

# C10 TE1D

286 kW @ 1500 rpm  
311 kW @ 1800 rpm

Stage II / Tier 3

## Standard configuration

FPT engine C10 TE1D equipped with:

- Mounted radiator incorporating air-to-air charge cooler
- Front radiator guard
- Oil drain pump
- Mounted belt driven pusher fan
- Fan guard
- Mounted air filter
- Fuel filter
- Primary fuel filter/water separator
- Replaceable oil filter
- Electronic engine control unit, pump injector units with wiring and sensor
- Interface box
- WT and OP sensors for samples
- HWT and LOP sensors
- Front engine mounting brackets
- Flywheel housing SAE1 and flywheel 14"
- Re-directable exhaust gas elbow
- Recircled oil breather system
- Oil dipstick
- 24Vdc electrical system
- User's handbook


THE ENGINE IS SUPPLIED WITHOUT LIQUIDS

## Optional equipment:

On request the engine can be supplied with:

- 230 Volt water jacket heater
- Turbo and exhaust gas guards
- Low water level sensor
- Exhaust gas flexible joint

## Overall dimensions:

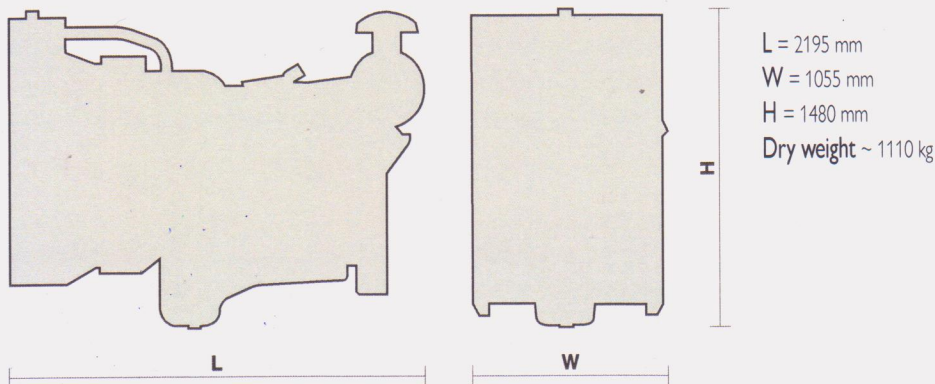

Publication P4A06C001E - 01.12  
Specifications subject to change without notice.  
Illustrations may include optional equipment.